

Cradle-PERF

The **Cradle-PERF** module applies user-defined calculations to an architecture model, to compare the performance of alternative architectures and apportion performance budgets to subsystem, component and equipment designs.

Simulation is an activity to reproduce a system's behaviour in an artificial environment to test the system in a variety of scenarios. Simulation is used where testing the real system is either dangerous, impracticable or too time-consuming or expensive.

The most fundamental behavioural characteristics of systems are set early in the design process, as alternative architecture topologies are assessed and performance budgets are set. But as there is no behaviour allocated to the components, it is not possible to build a simulation.

Performance assessment solves this problem. It is used before behaviour is known and allocated and so before simulation can be used. It can be used to confirm if a proposed architecture is viable. It can be used to compare performance characteristics of candidate architectures. It can be used to define budgets for lower design levels (apportionment). Later, it can be used to aggregate actual values.

Performance assessment is expressed in userdefined characteristics, typically concerned with timing, data error or precision, such as:

Bandwidth	Data rate
Utilisation	Staleness
Size	Weight
Cost	Power

They can be subdivided, for example to study best case, worst case and typical conditions. They are held as user-defined formulae in the specifications


and data definitions of the symbols in the architecture models' diagrams.

Any number of performance characteristics can be defined and associated with each diagram symbol. Each has its own formula. These are defined using a function library and user-defined calculation routines. This library contains logical, arithmetic, logarithmic, exponential, ladder, table lookup and interpolation routines, amongst others.

System performance requirements are applied as constraints to these characteristics by linking the items in the database and defining ranges of values for the performance characteristics that should not, or may not, be exceeded.

Analyses are run on state models that are sets of interconnected diagrams at appropriate levels in the architecture.

A state model can have external loads applied to it to represent different usage scenarios. An analysis can contain many such environmental loads. The environmental loads are defined as values of any of the performance characteristics at the external

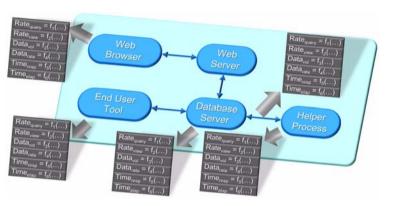

input(s) to the model.

Each analyses applies the environment load and calculates performance characteristics for all of the symbols in the state model's diagrams using the formulae and constraints in each symbol. The results are therefore quantitative. They are stored inside the symbols' descriptions.

The results can be reported in the same manner as other information in a Cradle database. They can also be graphed. The graphs will typically show the values of specified characteristics

Structured Software Systems Ltd (3SL) Suite 2, 22a Duke Street

Regd: 2153654 VAT: GB 473 2757 28

Barrow-in-Furness Cumbria LA14 1HH, UK

Tel: +44 (0) 1229 838867

Fax: +44 (0) 1229 870096



RC004/18 Date: February 2023 © 3SL Cradle is a registered trademark of 3SL in the UK and other countries. All rights reserved. <u>All other trademarks</u> are the property of their respective owners.


Cradle-7

From concept to creation.

http://www.threesl.com salesdetails@threesl.com support@threesl.com



along a path through the model, termed a thread. Each graph will show any constraints applied from the system requirements and the effect of the constraints on the analysis results. The data in such graphs can be exported to CSV.

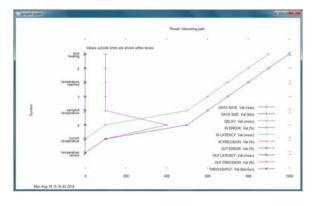

Any number of such thread analyses can occur.

The results will show that an architecture is viable if none of its constraints are violated.

Since the performance data is built into the architecture model, any changes to the model's topology (such as a change to the architecture) will be automatically reflected in changes to the performance results. This allows easy comparison between alternative architectures.

The analysis results are the characteristics of a viable architecture. Hence, they are the constraints or budgets for the next level of design. So the analysis of each level produces performance constraints for the next level. This process can continue through the design levels until the system behaviour is sufficiently defined

for simulation to be practicable.

Feature Summary

Feature	Benefits		
Performance assessment based on characteristics of system behaviour	Can be used before behaviour is decided or functions allocated to identify performance budgets		
Predictive tool	Defines constraints on each design level from the level above it		
Arbitrary subdivision of characteristics	Study multiple situations and contexts simultaneously, such as best case, worst case, and typical case		
Budget apportionment	Allocate budgets hierarchically downwards		
Result aggregation	Aggregate results from lower levels to the higher levels		
Constraint assignment	Limiting and advisory constraints to impose acceptance criteria and performance requirements on analyses		
Arbitrarily extensible	Add any number of performance characteristics to analyses		
Extensive function library	Pre-defined functions for all common operations including table lookups, step or ladder functions, linear interpolations, and linear, exponential and logarithmic expressions		
Access to external functions and simulations	Embed any external calculation or simulation routine for complete flexibility		
Multi-layer environmental effects	Build environment loads using a flexible three-tier approach, to test system failure conditions and explore maximum load criteria		
Define models for analysis	Define appropriate architectures or subsets of architectures for study at any level of detail		
Multiple analysis results held within the design	Allows comparative assessments of alternative architectures or alternative function allocations to, or within, subsystems		
Change to the model change the performance	Any change to the topology of the architecture model will directly affect its performance characteristics without any need to change the performance analysis		
Graphical output	Visually presents performance characteristics along threads for easy understanding of performance throughout the system		
Cross referenced to entire database	Linked to performance requirements and acceptance criteria		



Structured Software Systems Ltd (3SL) Suite 2, 22a Duke Street Barrow-in-Furness Cumbria LA14 1HH, UK Tel: +44 (0) 1229 838867 Fax: +44 (0) 1229 870096 Regd: 2153654 VAT: GB 473 2757 28 RC004/18 Date: February 2023 © 3SL Cradle is a registered trademark of 3SL in the UK and other countries. All rights reserved. All other trademarks are the property of their respective owners.

> http://www.threesl.com salesdetails@threesl.com support@threesl.com